



AC-SCM1-BT




Local connection box

The connection box AC-SCM1-BT is an accessory for the light curtain and multiple light beam devices series COMPACT*plus*. Sensors, buttons and display elements can be connected here by a M12 cable. These signals are transferred via a 0,5 m long common cable with angled M12 plug to the local socket of the COMPACT*plus* receiver or transceiver. The cable has to be mounted cross circuit safe, for example in an armoured tube. Except the green LED to display 24 VDC power supply, AC-SCM1-BT does not contain any electrical or electronical components and has thus no safety classification.


Features

- Supply and signal voltage +24V DC
- Connection in M12 technology
- Simple connection to the COMPACT*plus* receiver or transceiver of:
 - Muting sensors without testing
 - Muting indicator lamps, optionally several using the same line
 - Start button, optionally using the same line as the muting indicator lamp(s)
- 1- or 2-channel safety circuit
- Operating mode switch
- Complete set with mounting plate (e.g. to the installation in the mounting columns

Dimensional drawing

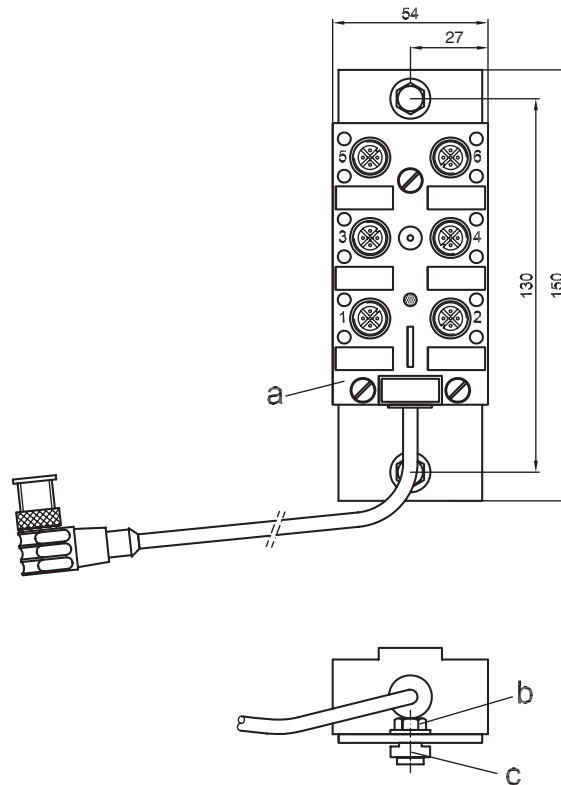

Internal wiring

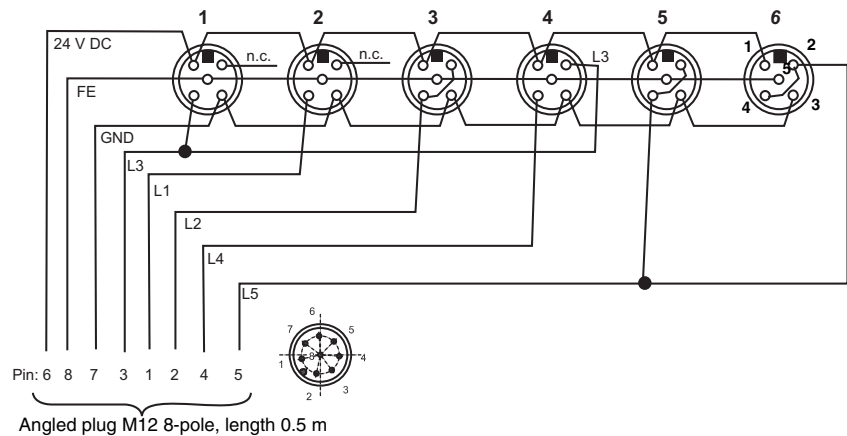

Technical data

power supply	+24 VDC ±20%
max. current	1 A
connection	6 sockets M12, 5-pole; 1 plug M12, 8-pole
isolation resistance	>10 ⁹ Ohm
protection degree	IP67
environmental temperature	-30 °C .. + 90 °C
housing	PA 6 GF 30
cable	PUR halogen free, color gray
housing color	black

Notes on Ordering

AC-SCM1-BT	Local connection box with mounting plate (with : 2 pieces screw-SZ M6x10 (b); 2 pieces sliding nut BT-NC (c)	520068
------------	--	--------

Leuze lumiflex GmbH + Co. KG
 Liebigstraße 4
 D-82256 Fürstenfeldbruck / Germany
 Tel. +49 8141 5350-0
 Fax +49 8141 5350-190
 e-mail: lumiflex@leuze.de
 www.leuze.com