



ROBUST RRT42.6



Multiple Light Beam Safety Device, Transceiver

Device-version with M12 connecting.



Safety Note:

When putting the Multiple Light Beam Safety Device ROBUST RRT42.6... into operation you should be familiar with the Connecting and Operating Instructions Multiple Light Beam Safety Devices Robust 4 and the Data Sheet ROBUST RRT42.6 ... version.

Features

- Multiple Light Beam Safety Device/Transceiver acc. to EN IEC 61496
- 2 safety-relay outputs
- M12 connecting (8-pole)

Electrical connection

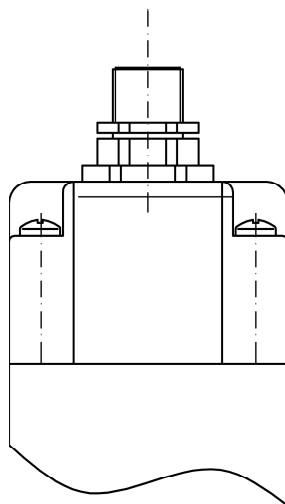

Color	Function	M12-Pin-Nr.
white	+ 24 VDC	1
brown	+ 0V	2
green	K 1.1	3
yellow	K 1.2	4
grey	K 2.1	5
pink	K 2.2	6
blue	n.c.	7
rt (PE)	shield	8

PIN-allocation M12 connection RRT42.6

max. switching voltage of the safety-relay-outputs amounts to 42V AC/DC.

Technical data

See the information on technical data in the Connecting and Operating Instructions Multiple Light Beam Safety Device ROBUST 4.

Order details

Part No.	Type	Designation
909692	ROBUST RRT42.6	Multiple Light Beam Safety Device, Transceiver
548405	CB-M12-5000-8G/F	connection cable with M12 plug, straight, length: 5m
548415	CB-M12-5000-8G/F	connection cable with M12 plug, straight, length: 15m